

1216 AXIAL TORSION LOAD CELL (U.S. & METRIC)

FEATURES & BENEFITS

- Measures load and torque
- Minimal crosstalk
- Extraneous load resistance
- Fatigue rated

SPECIFICATIONS

		Axial Bridge A	Torsion Bridge B
ACCURACY – (MAX ERROR)			
Nonlinearity – %FS		±0.04	±0.07
Hysteresis – %FS		±0.04	±0.05
Nonrepeatability – %RO		±0.02	±0.05
Creep, in 20 min – %		±0.025	±0.025
TEMPERATURE			
Effect on Zero – %RO / deg	°F	±0.0008	±0.0008
Effect on Output – % / deg	°F	±0.0008	±0.0008
Compensated Range	°F	+15 to +115	+15 to +115
	°C	-10 to +45	-10 to +45
Operating Range	°F	-65 to +200	-65 to +200
	°C	-55 to +90	-55 to +90
ELECTRICAL			
Rated Output – mV/V (Nominal)		1.50	1.80
Zero Balance – %RO		±2.0	±2.0
Input Resistance – Ohms		700 ±7	700 ±7
Output Resistance – Ohms		700 ±7	700 ±7
Excitation Voltage – VDC MAX		20	20
MECHANICAL			
Calibration		T & C	CW & CCW
Safe Overload – %CAP		±200	±200
Ultimate Overload – %CAP		±400	±400
Material		Aluminum	

STANDARD CONFIGURATION



Model 1216CEW-2K (Shown)



OPTIONS

- Connector protection
- Standardized output
- Transducer Electronic Data Sheet (TEDS)
- Custom calibration
- Special temperature range

ACCESSORIES

- Mating connector
- Instrumentation

1216 AXIAL TORSION LOAD CELL (U.S. & METRIC)

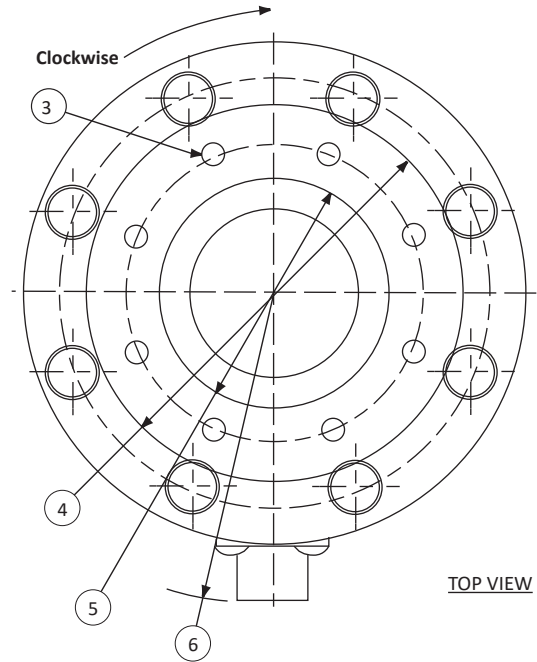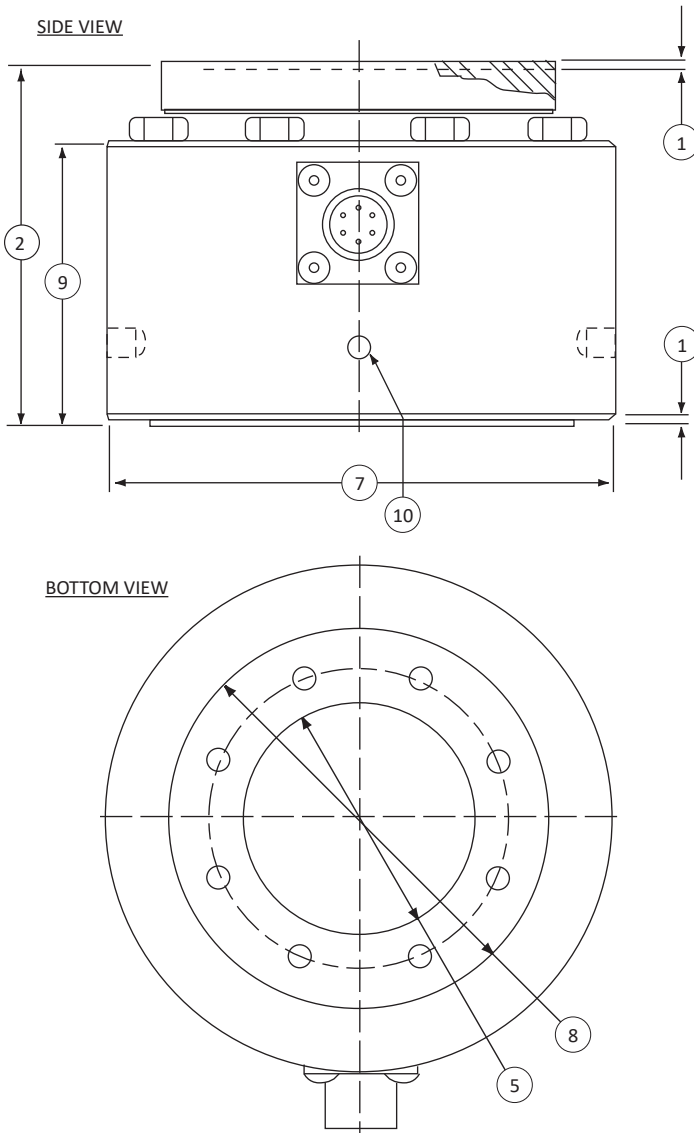

DIMENSIONS

See Drawing	CAPACITY	
	U.S. (lbf/lbf-in)	Metric (kN/Nm)
	250/125, 500/250, 1K/500, 2K/1K	1.11/14.1, 2.22/28.2, 4.45/56.5, 8.9/113
	in	mm
(1)	0.070	2.0
(2)	3.00	76.2
(3)	($\frac{1}{4}$ -28) UNF x $\downarrow$ 0.43 on a 2.600 B.C.	M6 x 1-6H x $\downarrow$ 10.9 on a 66.00 B.C.
(4)	$\varnothing$ 3.20	$\varnothing$ 77.2
(5)	$\varnothing$ 2.000 (+0.002 / -0.000)	$\varnothing$ 50.00 (+0.51/-0.00)
(6)	2.77	70.3
(7)	$\varnothing$ 4.13	$\varnothing$ 104.3
(8)	$\varnothing$ 3.20	$\varnothing$ 81.3
(9)	2.33	59.2
(10)	$\varnothing$ 0.25 $\downarrow$ 0.29	$\varnothing$ 6.4 $\downarrow$ 7.4